



CALL: 855-VERTETEK

[HOME](#)

[ABOUT VERTETEK](#)

[COAT OF SILENCE](#)

[APPLICATION PROCEDURES](#)

[TECHNICAL DATA](#)

[F.A.Q.](#)

[CONTACT US](#)



COUNT ON
COAT OF SILENCE®
FOR YOUR NEXT
SOUND PROOFING PROJECT.



QUIET HAS NEVER BEEN EASIER.

VerteTek, a world innovator and manufacturer, brings you Coat of Silence®. The most effective, highest performing sound reduction coating on the market today. Coat of Silence is a scientifically proven, easy to apply, paintable sound reduction solution for use on interior surfaces including ceilings, walls, plaster and drywall. No other sound reduction process offers such superior results with so little work.

HOW IT WORKS:

- EASY 2-STEP PROCESS
- ONLY PAINTING SKILLS REQUIRED
- ONE PERSON PROCESS
- SPRAY ON

[APPLICATION PROCEDURES](#)

THE TECHNOLOGY BEHIND SOUND REDUCTION PAINT.

LEARN HOW COAT OF SILENCE® HAS ACHIEVED THE HIGHEST STC RATING FOR A SOUND REDUCTION COATING.

[TECHNICAL DATA](#)

PURCHASE COAT OF SILENCE® FROM OUR DISTRIBUTOR ACOUSTICAL SURFACES, INC.

[Buy Now!](#)



SIGN-UP NOW FOR PRODUCT NEWS AND SPECIAL OFFERS!

Email:

[sign up](#)



ACOUSTICAL SURFACES, Inc.

Your One-Stop Resource for Soundproofing and Noise Control Solutions

Applications What's Your Problem? Acoustics 101 Soundproofing Tips Literature Photos News
Who We Are Financing Contact Us Links Site Map Blog Home

Noise Control Help Line
1-800-854-2948
M-F 7am-6pm (Central Time)
BEST PRICE GUARANTEE

- ☐ ECHO ELIMINATOR™
- ☐ SOUND SILENCER™
- ☐ CFAB™ CELLULOSE PANELS
- ☐ dBA Panels
- ☐ POLY MAX ACOUSTICAL PANELS
- ☐ DECORATIVE FABRIC WRAPPED PANELS – WALL PANELS
- ☐ SOUND ABSORBING FOAM
- ☐ HANGING ACOUSTICAL BAFFLES
- ☐ SONEX™ FOAM PRODUCTS
- ☐ ACOUSTIC QUILTED CURTAIN
- ☐ NOISE BARRIER-NOISE BLOCKERS
- ☐ FLOORING UNDERLAYS
- ☐ SEALANTS – ADHESIVES – PAINTS & COMPOUNDS
- ☐ ACOUSTICAL CEILING TILES
- ☐ SOFTWALL – WALLMATE
- ☐ VIBRATION MOUNTS – HANGERS & PADS
- ☐ HVAC PRODUCTS / SILENCERS
- ☐ WALL INSULATION
- ☐ ELECTRONICS – SOUND LEVEL METERS
- ☐ SOUND TESTING & ACOUSTICAL ANALYSIS SERVICES
- ☐ ADJUSTABLE DOOR SEALS
- ☐ SCHOOL NOISE MANAGEMENT
- ☐ ACOUSTIC WINDOWS – INSERTS
- ☐ ACOUSTIC / SOUNDPROOF DOORS
- ☐ ACOUSTIC ENCLOSURES
- ☐ RSIC SOUND ISOLATION CLIPS
- ☐ ACOUSTI-BOARD
- ☐ SOUND MASKING SYSTEM
- ☐ OUTDOOR BARRIER WALL™ SYSTEM
- ☐ ONE STEP DECORATIVE WALL SYSTEM
- ☐ ACOUSTIMETAL™ PERFORATED METAL PANELS
- ☐ SOUNDSCREEN™ WHITE NOISE MACHINE
- ☐ ACOUSTI-GASKET™ TAPE



Coat of Silence™

Spray-On Sound Reducing Coating

Introducing Coat of Silence – the easy to use, spray on coating for all your interior sound reduction projects.

- As Simple as Applying Paint
- One Person Process
- Consistency in Performance
- High Degree of Sound Reduction
- Reduce Noise Transmission
- Cost Effective
- Mold, Mildew and Water-Resistant
- Class A Fire Retardant



The Coat of Silence sound reduction system is applied using a 2-step application process of two layers of “resilient” Base Coat followed by a “mass building” Finish Coat. By increasing mass while imparting reflective and absorptive properties, Coat of Silence reduces sound transmission through walls and ceilings. The Coat of Silence Base Coat layer retains resiliency over time and the durable Finish Coat is ready for the paint or wall covering of your choice.

The Coat of Silence brings a 2-step system that can be sprayed onto any existing surface or with new construction. A new proven soundproofing solution that keeps the noise out, the cost and labor down. Applications include hospitals, hotels, schools, condos, apartments, home media rooms, offices, retail centers, construction and many more.

View [Frequently Asked Questions](#)

STC RATING: Can increase room/partition by 3-7 points depending on room construction and application methods.

COLOR: White

DENSITY:

Base Coat – 9.45 ± 0.2 lbs/gal

Finish Coat – 9.85 ± 0.2 lbs/gal


DRY CONTENT:

Base Coat TNV – 64.28% (62 ± 2)

Finish Coat TNV – 61.61% (62 ± 2)


CLEANING & DILUTION: Water

APPLICATION: Sprayed

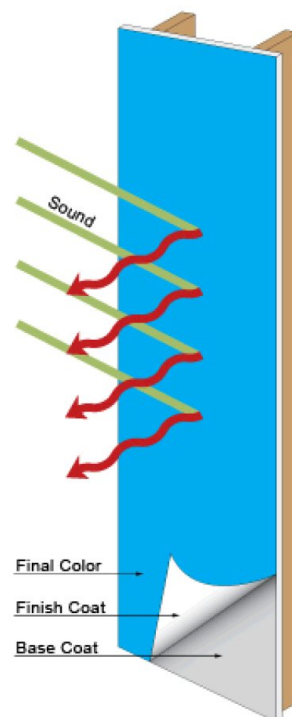

- T-MOLD SYSTEM™
- ACOUSTICAL FABRIC SELECTION
- ADJUSTABLE CUTTERS – SPRINKLER CUTTER
- DESIGNER ACOUSTICAL CURTAINS
- BUY NOW PAY LATER

[STATEMENT OF WARRANTY](#)



APPLY TEMPERATURE: Between 50°F and 90°F
SPRAY NOZZLE SPECIFICATIONS: A 317 tip is recommended
COVERAGE:

- Base Coat – Two gallons (approximately) per 100 sq ft
- Finish Coat – Two gallons (approximately) per 100 sq ft

Example: A job requiring 500 sq ft of coverage would require 20 gallons of product, 10 Base Coat and 10 Finish Coat; two layers of each coat.

LENGTH OF STORAGE: Original, unopened containers may be stored up to 12 months. Open, unused material should be disposed of after a 6-month period.

FLAMMABILITY: Flame Spread: 15; Smoke Developed: 10

Easy To Use

The Coat of Silence sound reduction system is applied using a 2-step application process of 2 layers of “resilient” Base Coat followed by 2 layers of “mass building” Finish Coat to reach an ideal thickness of 25-35 mils. We recommend only those with commercial/airless spray application experience, or painting/coatings professional, attempt to apply this product.

Step One: After priming your surface, two coats of Base Coat is recommended for best sound reduction results.

- Because of the product thickness, stir thoroughly with drill or paddle.
- Because a membrane is created, spray an ample coat without running.
- To effectively achieve thickness of product, do a vertical and horizontal pass for each layer.
- For best performance, wait 20-40 minutes between layers, or until product is dry.

Step Two: Two coats of the Finish Coat is recommended for best performance.

It can be painted over by any kind of paint, including latex & enamel.

- Because of product thickness, stir thoroughly with drill or paddle.
- Apply an even coat to ensure a consistent finished surface.
- To effectively achieve thickness of product, do a vertical and horizontal pass for each layer.
- For best performance, wait 20-40 minutes between layers, or until product is dry.



Specifications subject to change without notice.

© 2012 Acoustical Surfaces, Inc. – All Rights Reserved.

Application: An airless sprayer with a 317 tip and 1,800 to 2,400 psi is recommended. Be sure to clean the sprayer using soap and water within 30 minutes (after last use) or the material will begin to set inside the sprayer.

Please note: the dampening ability of the material is not affected by application method.

Clean Up: Clean up can be done with soap and warm water.

Below is a video showing the Finish Coat (white) being applied over the top of Base Coat (grey).

Cost Comparison		
QuietRock	Acoustiblok	Coat of Silence
QuietRock Sheet	AcoustiBlok Membrane	Base & Finish Coat
Requires replacement of existing drywall	Required rehab to add the membrane	Done on any existing wall – no extra labor required
2 Tradesmen		1 Person, Paint Spray Skill Set
Cost \$5.86/SF*	Cost \$14.31/SF	Cost \$2.80/SF
Walls still need to be primed & painted		Wall is finished in white, or paint color of choice
Comparisons based on a common wall 10'x12' room with 5/8" pre-existing wall (480 square feet)		
*Does not include extensions of trim, jams & electrical to accomodate thicker walls.		

Significant Sound Reduction

With the Coat of Silence 2-coat process, mid range sounds become contained. Common noise is greatly reduced. We have reached an industry high – even the test labs were a buzz. To date, no other sound reduction solution can deliver with the consistency of Coat of Silence. Manufactured at the same high quality as major


paint manufacturers.

Our patent-pending Coat of Silence resilient layer (Base Coat) is scientifically formulated to increase the STC rating of a room/partition by 3-7 points depending on the room construction and application methods. The Base Coat forms nano membranes that create sound absorbing and sound deflecting barriers. Our Finish Coat has the same sound deflecting formula to complete the sound reduction system.

No other sound reduction process offers such results with so little work. It's tested in accordance with ASTM E90-09 and E413-04 as well as UL tested. Underwriter Laboratory has been testing products and helping to define standards for more than 75 years and they evaluate more than 19,000 types of products, components, materials and systems a year. With these testing standards, you know Coat of Silence silences the competition, as well as the room.

Coat of Silence – Improvement of One Side Coated Wall to Attenuate Sound

Frequency (Hz)	Uncoated Wall	One Side Coated Wall	Improvement of	Two Side Coated Wall	Improvement of
125	20.6	23.3	2.7	23.4	2.8
3150	38.1	40.7	2.6	43.4	5.3
4000	41.9	44.4	2.5	46.9	5.0
5000	48.8	51.5	2.7	54.1	5.3
6300	53.3	55.5	2.2	58.2	4.9
5000	59.4	61.7	2.3	64.3	4.9

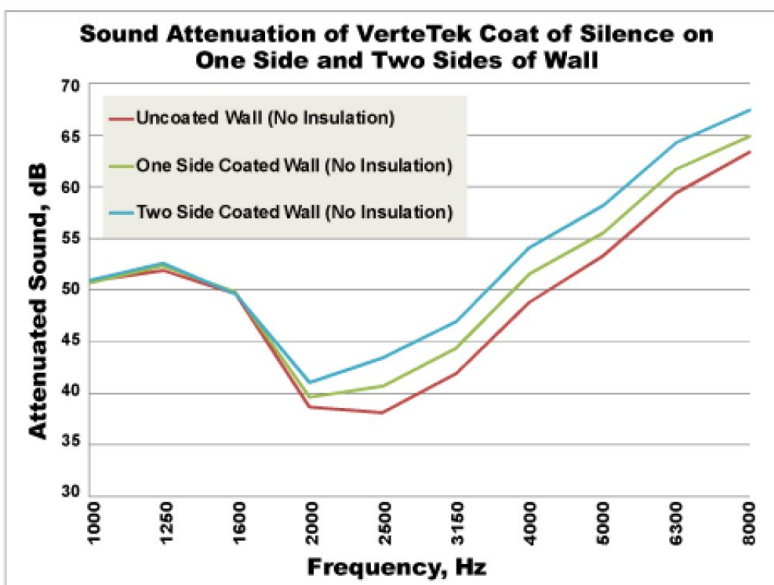

Downloads

1. [Coat of Silence Information Sheet](#)
2. [Coat of Silence White Paper](#)
3. [Coat of Silence Evaluation of One and Two Sided Applications on a Steel Stud Gypsum Wall](#)
4. [Coat of Silence Sound Transmission Loss Test](#)
5. [Coat of Silence Before & After Testing](#)
6. [Coat of Silence Fungus Test](#)
7. [Coat of Silence Technical Analysis](#)
8. [Coat of Silence Thermal Resistance](#)
9. [Coat of Silence MSDS](#)
10. [Coat of Silence Manufacturer Warranty](#)



Click to download a free copy of Adobe Acrobat Reader.

• Soundproofing Products • Sonex™ Ceiling & Wall Panels • Sound Control Curtains • Equipment Enclosures • Acoustical Baffles & Banners • Solid Wood & Veneer Acoustical Ceiling & Wall Systems • Professional Audio Acoustics • Vibration & Damping Control Fire Retardant Acoustics • Hearing Protection • Moisture & Impact Resistant Products • Floor Impact Noise Reduction • Sound Absorbers • Noise Barriers • Fabric Wrapped Wall Panels • Acoustical Foam (Egg Crate) Acoustical Sealants & Adhesives • Outdoor Noise Control • Assistive Listening Devices • OSHA, FDA, ADA Compliance • On-Site Acoustical Analysis • Acoustical Design & Consulting • Large Inventory • Fast Shipment • No Project too Large or Small • Major Credit Cards Accepted

[sound absorption](#)

[noise blocking](#)

[fabric wrapped panels](#)

[soundproof foam](#)

[noise barriers](#)

[acoustical panels](#)

[soundproofing drywall](#)

123 Columbia Court North • Suite 201 • Chaska, MN 55318 • Tel: (952)-448-5300
Fax: (952)-448-2613 • 1-(800)-854-2948 • Email: sales@acousticalsurfaces.com

NOISE CONTROL HELP LINE 1-(800)-854-2948